


SOM-5885


Intel® 14th Gen Core Processors (Code Name: Meteor Lake U/H) COM Express® Basic Type 6 Module

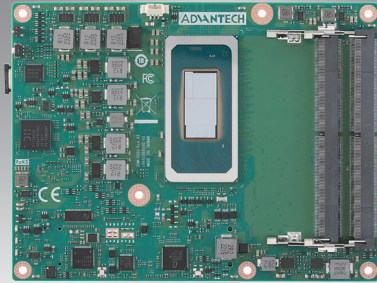

Features

- COM Express® R3.1 Basic Module Type 6 Pinout
- Intel® 14th Gen Core Processors , Up to 14C/20T
- Intel Xe LPG graphic up to 128EU, 4 independent 4K display
- Dual-CH DDR5 5600MT/s up to 96GB SODIMM
- Multiple I/O expansion: 2.5GbE, PCIe gen4, USB4 & USB3.2 Gen2, SATA3.0
- Support Dual BIOS failsafe
- Supports iManager, Embedded Software APIs and Wise-DeviceOn


Software APIs:



Specifications

Form Factor	Form Factor	COM Express Basic					
	Pin-out Type	COM Express R3.1 Type 6 compatible					
Processor System	CPU	Core Ultra 7 165H	Core Ultra 7 155H	Core Ultra 5 125H	Core Ultra 7 165U	Core Ultra 7 155U	Core Ultra 5 125U
	Base Frequency (P/E-core)	1.4GHz/0.9GHz	1.4GHz/0.9GHz	1.2GHz/0.7GHz	1.7GHz/1.2GHz	1.7GHz/1.2GHz	1.3GHz/0.8GHz
	Max Turbo Frequency (P/E-core)	5GHz/3.8GHz	4.8GHz/3.8GHz	4.5GHz/3.6GHz	4.9GHz/3.8GHz	4.8GHz/3.8GHz	4.3GHz/3.6GHz
	Cores (P+E+LPE)	16C (6P+8E+2LPE)	16C (6P+8E+2LPE)	14C (4P+8E+2LPE)	12C (2P+8E+2LPE)	12C (2P+8E+2LPE)	12C (2P+8E+2LPE)
	LLC	24MB	24MB	18MB	12MB	12MB	12MB
	Default TDP	45W	45W	45W	28W	28W	28W
	cTDP	20W-45W	20W-45W	20W-45W	12-28W	12W-28W	12W-28W
	vPro	Intel vPro® Enterprise	Intel vPro® Essentials	Intel vPro® Essentials	Intel vPro® Enterprise	Intel vPro® Essentials	Intel vPro® Essentials
BIOS	AMI UEFI 256Mbit						
Memory	Technology	DDR5					
	Speed	5600 MT/s					
	Max. Capacity	Up to 96GB					
	Channel/Socket	Dual Channel / 2 Sockets SODIMM, 1DPC					
Graphics	ECC Support	IB ECC					
	Controller	Intel® Xe LPG Graphics					
	Graphics EU	128EU	128EU	112EU	64EU	64EU	64EU
	Max. Frequency	2.3GHz	2.25GHz	2.2GHz	2.0GHz	1.95GHz	1.85GHz
Display	3D/HW Acceleration	HW Encode: Supports AVC/H264, JPEG, HEVC/H265, VP9 and AV1. HW Decode: Supports MPEG2, AVC/H264, JPEG/MJPEG, HEVC/H265, VP9 and AV1					
	LCD (LVDS/eDP)	1port LVDS Dual channel: 1920 x 1200 @60Hz/eDP 4096 x 2304 @60Hz					
	DDI (HDMI/DisplayPort)	3 DDI Port Support Configurable HDMI/DisplayPort -HDMI 2.1: 4096 x 2304 @ 60Hz -DisplayPort 2.1 HBR3: 4096 x 2304 @ 60Hz					
Expansion	Multiple Display	Quad Simultaneous Independent Display					
	PEG	PEG (H series): PCIe Gen4, 16 lanes, Bitfurcate to 1 x8, 2 x4 PEG (U series): PCIe Gen4, 8 lanes, Bitfurcate to 2 x4					
Serial Bus	PCI Express	PCIe: PCIe gen4, Up to 8 lanes & Up to 8 end devices -4 PCIe Gen4 lanes, Bitfurcate to x1, x2, x4 -Default 4 PCIe Gen4 & Gen3 lanes which support x1 only (Option with 2 SATA & PCIe Switch, Support PCIe x4 bitfurcate to x1, x2, x4)					
	SMBus	Yes					
Ethernet	I2C Bus	Yes					
	Gigabit	Intel I226 controller; Speed: 10M / 100M / 1000M / 2.5G speeds					
I/O	SATA3.0	Up to 2 Ports (6Gbps), Configurable by 4 lanes [0,2]/[1,3]					
	USB4	Up to 2 ports, Co-lay with DDI, Support by SOM-MZ20					
	USB3.2 (Gen2)	4 Ports (10 Gbps)					
	USB2.0	8 Ports (480 Mbps)					
	SPI Bus	Yes. For BIOS EEPROM, Support Dual BIOS failsafe					
	GPIO	8-bit, Default from iManager, Option from CPU					
	LPC	Yes					
	Audio Interface	HD Audio					
	Watchdog	65536 level, 0 ~ 65535 sec					
	COM Port	2 Ports (2-Wire)					
Power	TPM	TPM2.0					
	CAN Bus	Support one CAN Bus option from COM Port					
	Type	ATX: Vin, VSB; AT: Vin					
	Supply Voltage	Vin: 8.5V ~ 20V; VSB: 4.75V ~ 5.25V; RTC Battery: 2.0V ~ 3.3V					
Environment	Power Consumption (Max.)	TBD					
	Power Consumption (Idle)	TBD					
	Operating Temperature	Standard: 0 ~ 60 °C (32 ~ 140 °F)					
	Storage Temperature	-40 ~ 85 °C (-40 ~ 185 °F)					
Mechanical	Humidity	Operating: 40°C@95% relative humidity, non-condensing Storage: 60°C@95% relative humidity, non-condensing					
	Vibration Resistance	3.5 Grms					
Dimensions	125 mm x 95 mm (4.92" x 3.74")						

Block Diagram

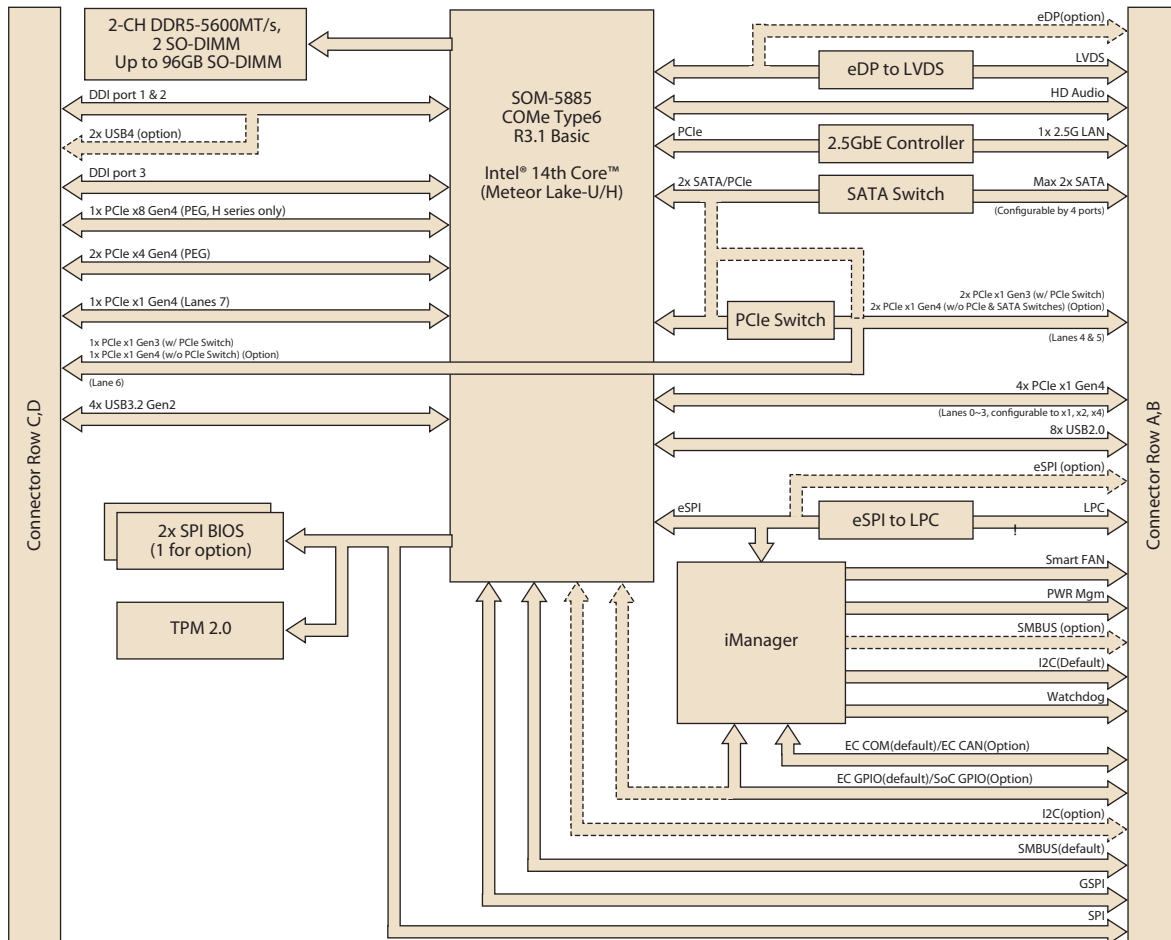

PCIe configuration

	PEG	PCIe	SATA
Configuration 1 (With PCIe switch)	1x PCIe x8 Gen4 (H series only) 2x PCIe x4 Gen4	4x PCIe x1 Gen4 (x1, x2, x4) 1x PCIe x1 Gen4 3x PCIe x1 Gen3	2x SATA3
Configuration 2 (Without PCIe switch)	1x PCIe x8 Gen4 (H series only) 2x PCIe x4 Gen4	4x PCIe x1 Gen4 (x1, x2, x4) 2x PCIe x1 Gen4	2x SATA3
Configuration 3 (Without PCIe switch)	1x PCIe x8 Gen4 (H series only) 2x PCIe x4 Gen4	8x PCIe x1 Gen4 (x1, x2, x4)	N/A

Ordering Information

Part No.	CPU	Cores (P+E+LPE)	Default TDP	cTDP	Base Freq.	Max. Turbo Freq.	LLC	DDR5 SODIMM	PCIe Switch	IBECC	Thermal Solution	Operating Temp.
SOM-5885C7HV-S4A1	Core Ultra 7 165H	16C (6P+8E+2LPE)	45W	20W-45W	1.4GHz/0.9GHz	5GHz/3.8GHz	24MB	Non-ECC	Yes	Yes	Active	0-60°C
SOM-5885C7H-S4A1	Core Ultra 7 155H	16C (6P+8E+2LPE)	45W	20W-45W	1.4GHz/0.9GHz	4.8GHz/3.8GHz	24MB	Non-ECC	N/A	Yes	Active	0-60°C
SOM-5885C5H-S2A1	Core Ultra 5 125H	14C (4P+8E+2LPE)	45W	20W-45W	1.2GHz/0.7GHz	4.5GHz/3.6GHz	18MB	Non-ECC	N/A	Yes	Active	0-60°C
SOM-5885C7UV-S7A1	Core Ultra 7 165U	12C (2P+8E+2LPE)	28W	12W-28W	1.7GHz/1.2GHz	4.9GHz/3.8GHz	12MB	Non-ECC	N/A	Yes	Active	0-60°C
SOM-5885C7U-S7A1	Core Ultra 7 155U	12C (2P+8E+2LPE)	28W	12W-28W	1.7GHz/1.2GHz	4.8GHz/3.8GHz	12MB	Non-ECC	N/A	Yes	Active	0-60°C
SOM-5885C5U-S3A1	Core Ultra 5 125U	12C (2P+8E+2LPE)	28W	12W-28W	1.3GHz/0.8GHz	4.3GHz/3.6GHz	12MB	Non-ECC	N/A	Yes	Active	0-60°C

Any other SKUs or combination is project based support. Please contact sales for details.

Development Board

Part No.	Description
SOM-DB5830-00A3	COMe Devel. Board COMe R3.1 Type6 pin-out (LVDS) 0 ~ 60 °C
SOM-DB5830A-00A3	COMe Devel. Board COMe R3.1 Type6 pin-out (eDP) 0 ~ 60 °C

Optional Accessories

Part No.	Description
1970005036T001	Semi-Cooler 125 x 95 x 33.2 mm with 12V Fan
1970005940T001	QFCS 125x95x26.2mm

Packing List

Part No.	Description	Quantity
-	SOM-5885 COM module	1
1970005918T001	Heatspreader	1

Embedded OS

OS	Part No.	Description
Win10	20706WX1HS0106	img W10 21HL SOM-5885 64b 21H2 ENU
Win10	20706WX1VS0106	img W10 21VL SOM-5885 64b 21H2 ENU
Win10	20706WX1ES0106	img W10 21EL SOM-5885 64b 21H2 ENU

Memory AVL List

Vendor	PN	Speed	Capacity
ADATA	AD5S560048G-B	5600 MT/s	48GB
ADATA	AQD-SD5V32GN56-SB	5600 MT/s	32GB
Advantech	SQR-SD5N32G5K6HNAB	5600 MT/s	32GB
Advantech	SQR-SD5N32G5K6MNDB	5600 MT/s	32GB
Advantech	SQR-SD5N32G5K6SNPB	5600 MT/s	32GB
Apacer	D22.35305S.001	5600 MT/s	32GB
Hynix	HMCG88AGBSA095N2	5600 MT/s	32GB
Micron	MTC8C108YS1SC56BB1	5600 MT/s	24GB
Micron	MTC16C2085S1SC56BD1	5600 MT/s	32GB
Samsung	M425R4GA3PB0-CWMOD	5600 MT/s	32GB